



PROTECTA™
AWNING SYSTEMS - BY UNILINE



GUIDE RAIL GR

Want to shade your windows from direct sunlight without losing out on fresh air and breezes?

Cue the bestselling Guide Rail Awning from Uniline. Created for ground floor windows, the slanted design sits out slightly from the base of the window, inviting breezes while still maintaining optimum privacy and heat protection.

FEATURES & BENEFITS

- Perfect performance, year after year, thanks to Uniline's quality engineering revered for outstanding strength and longevity
- Ideal in coastal locations

PROTECTS FROM



STANDARD COLOUR RANGE




*Available in 40 custom colours on request.

SEAMLESS

HOOD CLEAN LOOKING CURVES WITH NO VISIBLE JOINING LINES

DURABLE CAST ALUMINIUM

Can be face fit or reveal fit and allow for the removal of the roller tube without removing the system from the wall. The simplicity of the headbox and hooding allows easy access to operational spring system.

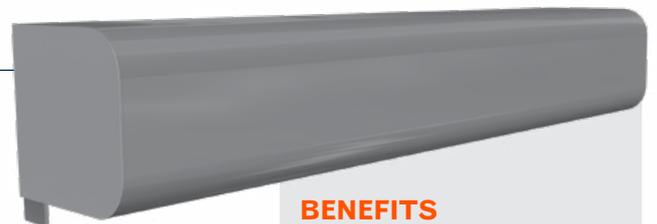

BENEFITS

- Modern Design
- Easy Clip-In Installation
- Lightweight
- Cast Aluminium

New

ONE COMPONENT

BRACKET WITH COVER BEST OF BOTH WORLDS LESS COST AND LESS STORAGE



GUIDE RAIL




SPECIFICATIONS

	STANDARD	
Maximum Width	4000mm	
Maximum Drop	3000mm	
Maximum Area	12m ²	
Hoarding Size	Height – 120.9mm Projection – 129.6mm Material – Aluminium 6106 - T6 Finish – Powder Coat	
Cassette	Aluminium 6106 - T6	
Bottom Rail	5 Sided Tube Steel Powder Coated 5 Sided Tube Aluminium	
Bottom Rail End Cap	Cast Aluminium	
Tube	63mm Roll Formed Zinalume® .75mm AZ150 (5600mm/6500mm) Aluminium 6106 - T6 50mm Roll Formed Zinalume	
Drives	63mm Unispring Assembly 830mm and 13700mm 50mm Unispring Assembly 515mm and 830mm	
Drive End	Nylon 66 (5% Glass Filled)	
Idler with Hole	Nylon 66 (5% Glass Filled)	
Brackets	Zinc Plated Mild Steel Powder Coated	New Cast Aluminium
Bracket Covers	Cast Aluminium	
Pivot Pin and Plate	T304 Stainless Steel Mild Steel (Zinc Plated Service Condition 4)	
Guide Rods	Zinc Coated Steel Stainless Steel 304	
Automatic Arms	Zinc Coated steel with Brass Rollers Stainless Steel 304	
L Bracket	Zinc Coated Steel Stainless Steel 304	

New

STANDARD BRACKET WITH COVER

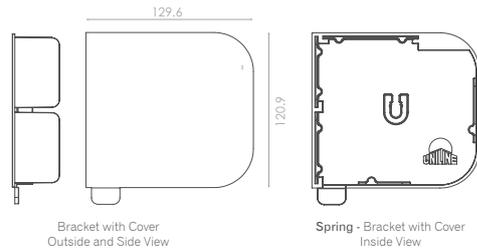

STANDARD HOODS



UNISPRING

PRETENSION CHART

- 50mm 58mm short and 63mm 515mm short
- 50mm 830mm standard
(add helper spring for fabric over 600g/m²)
- 63mm 1370 mm standard
- 63mm standard with helper
(equal pretension turns on each spring)

DROP (mm)	WIDTH (mm)															
	600	900	1200	1600	1800	2100	2400	2700	3000	3300	3600	3900	4200	4500	4800	5000
300	5	5	6	6	7	8	9	10	10	12	13	13	14	14	8+8	8+8
600	5	5	6	6	7	9	9	10	10	12	13	13	14	14	8+8	8+8
1200	5	5	6	6	7	9	9	10	10	12	13	13	14	14	8+8	8+8
15000	5	5	6	6	8	8	9	10	10	12	13	13	14	14	8+8	8+8
1800	5	5	6	8	8	9	9	10	10	12	13	13	14	14	8+8	8+8
2100	5	5	6	8	8	9	9	10	10	12	13	13	14	14	8+8	8+8
2400	5	5	6	8	8	9	9	12	12	12	13	13	14	7+7	8+8	8+8
2700	5	5	6	8	8	9	9	12	12	12	13	13	7+7	7+7	8+8	8+8
3000	5	5	6	10	10	11	11	12	12	12	13	7+7	7+7	7+7	8+8	8+8
3300	5	5	6	10	10	11	11	12	12	12	7+7	7+7	7+7	7+7	8+8	8+8
3600	5	5	6	10	10	11	11	12	12	12	6+6	7+7	7+7	7+7	8+8	8+8

A New Era in External Awnings... Amazing Shade

Call: 02 6041 2822 // info@sunjan.com.au // sunjan.com.au
256 TOWNSEND ST, ALBURY SOUTH, NSW 2640

