




A New Era in External Awnings...

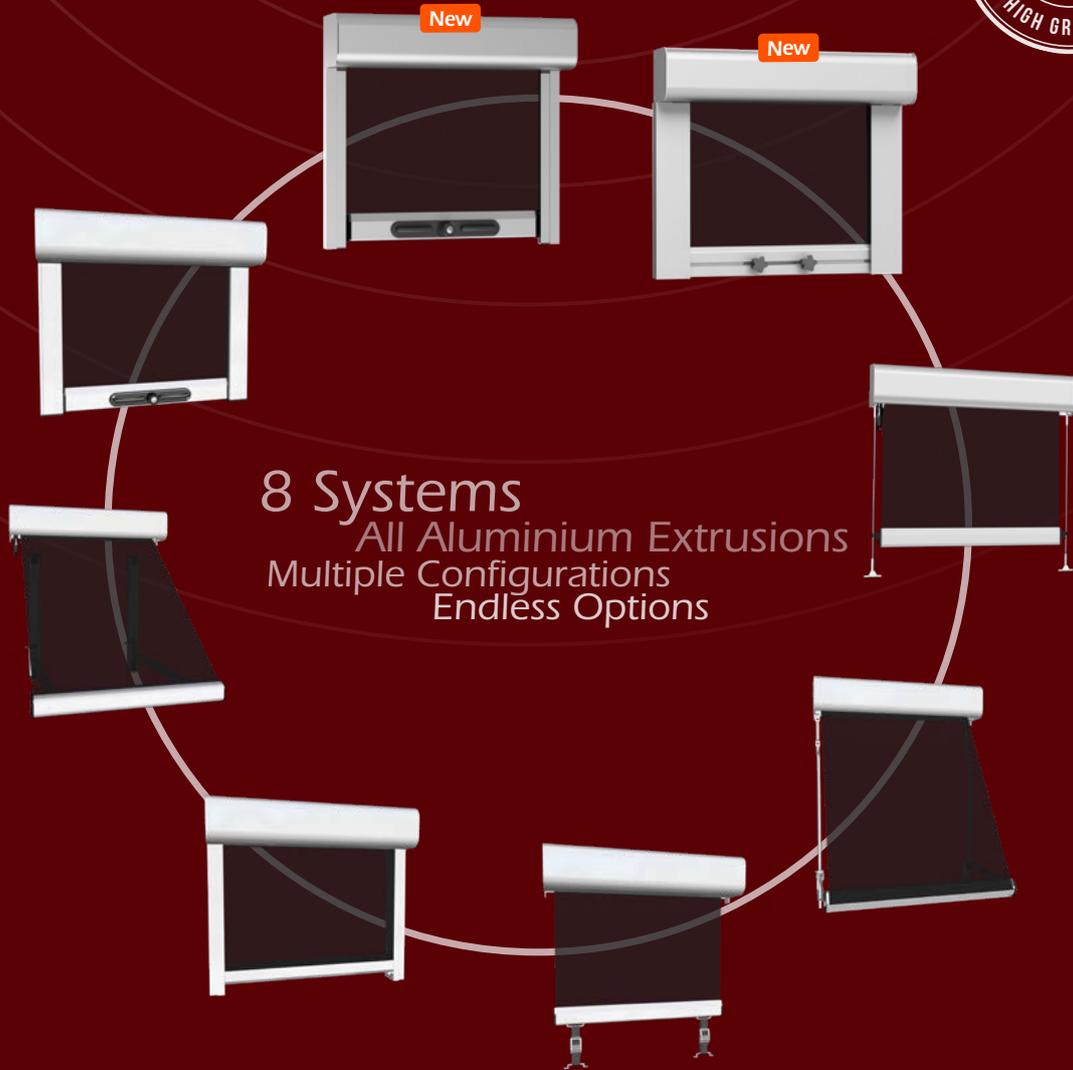

8 Systems  
All Aluminium Extrusions  
Multiple Configurations  
Endless Options


Scan Me




Trade Brochure  
Protecta Awnings



# SYSTEM DEMONSTRATION

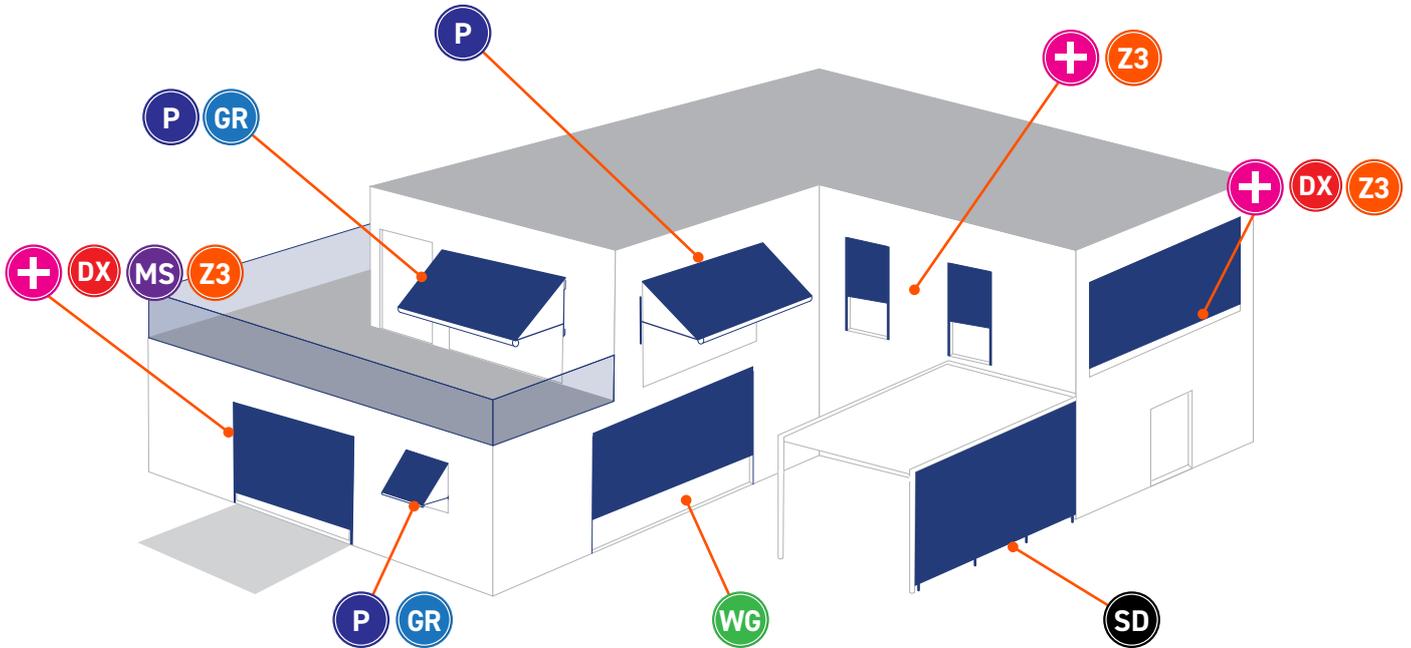

# SIZE RANGE

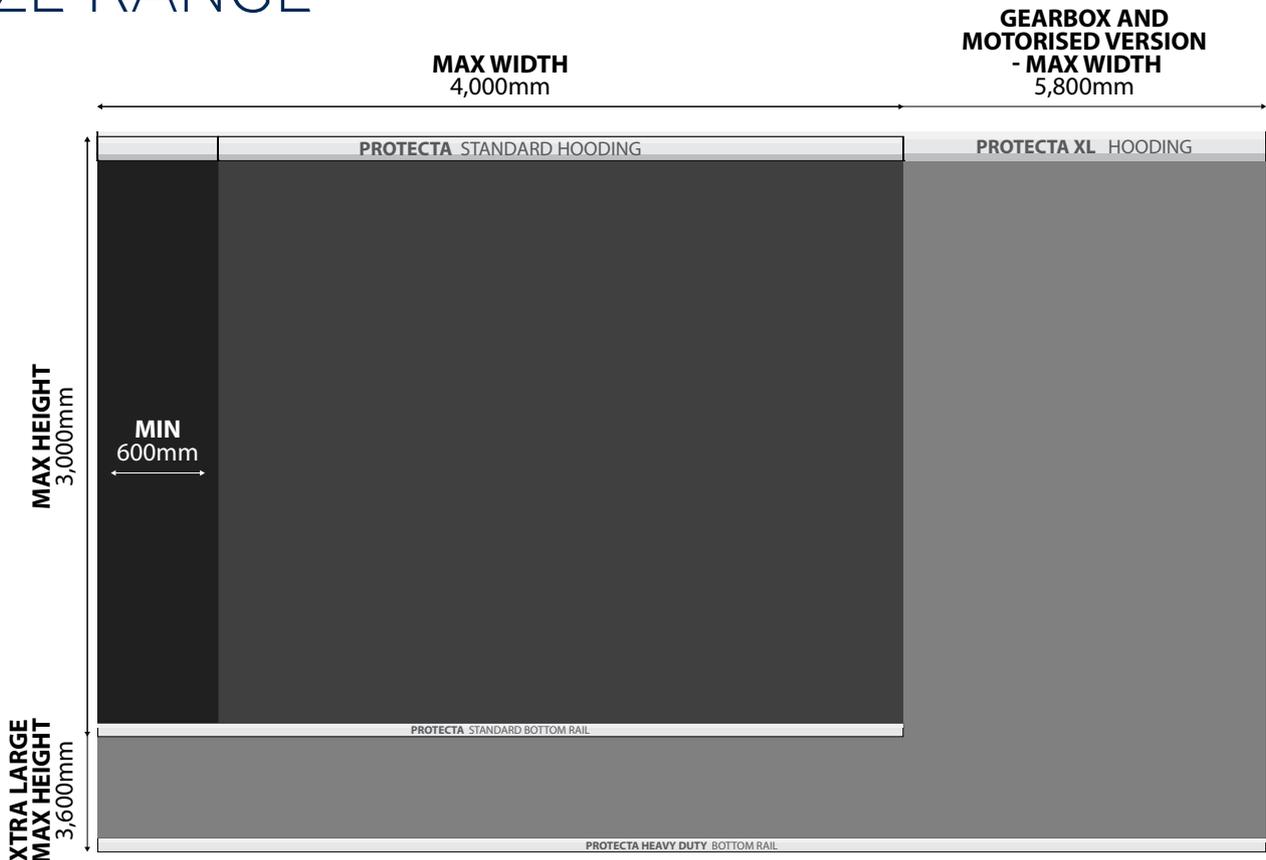



# 8 Systems

## All Aluminium Extrusion

### Multiple Configurations

### Endless Options

CROSS SYSTEM COMPATIBLE



								
	PLUS CHANNEL	Z3 SIDE CHANNEL	DEEP CHANNEL XL	WIRE GUIDE	GUIDE RAIL	PIVOT	MULTI-STOP	STRAIGHT DROP
XL HOODING	●	●	●	●				●
FULL HOODING	●	●	●	●			●	●
HALF HOODING	●	●	●	●	●	●	●	●
WITHOUT HOODING	●	●	●	●	●	●	●	●
LOCKABLE BOTTOM RAIL	●	●	●					
SPRING OPERATED	●	●			●		●	
GEARBOX OPERATED	●	●	●	●		●		●
MOTORISED OPERATED	●	●	●	●		●		●
4m+ WIDE	WITH GEARBOX AND MOTOR ONLY		WITHOUT HOODING ONLY & 3 ARMS		WITH GEARBOX AND MOTOR ONLY			

## STANDARD COLOUR OPTIONS

Also available in 40 custom colours - Contact Uniline for details.

WHITE



BLACK



MONUMENT



SLATE GREY



SMOOTH CREAM





# MODERN DESIGN & LIGHTWEIGHT UNIVERSAL HOODING



THE PROTECTA HOODING IS MADE FROM 100% DURABLE HIGH GRADE ALUMINIUM TO WITHSTAND THE HARSH AUSTRALIAN COASTAL CLIMATE.

The extruded aluminium hooding comes in two pieces for simplicity of installation with the option of a closed or open hooding front.

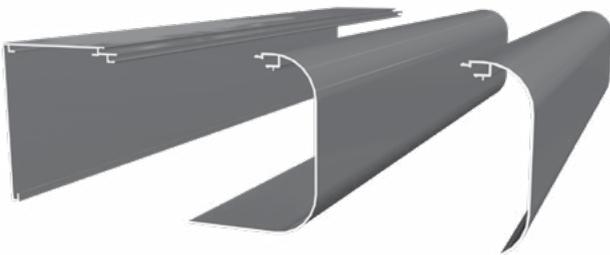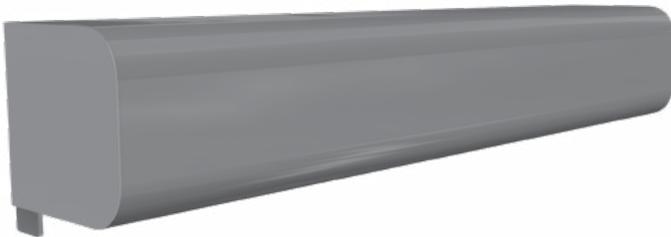


SELECT WITH **XL FULL, STANDARD FULL OR HALF HOODING**

- Available in three options:
  1. Xtra Large Full hooding
  2. Standard Full hooding
  3. Standard Half hooding
- Modern Design & Lightweight
- Easy clip-in installation
- PROTECTA Awning Systems can be face fit or reveal fit and allow for the removal of the roller tube without removing the system from the wall
- The simplicity of the headbox and optional hooding allows easy access to operational spring, gearbox or motor
- Optional colour coordinated bracket made from durable cast aluminium gives the hooding a clean lined and concealed finish enhancing the overall appearance


**New**

## XTRA LARGE BRACKET AND COVER

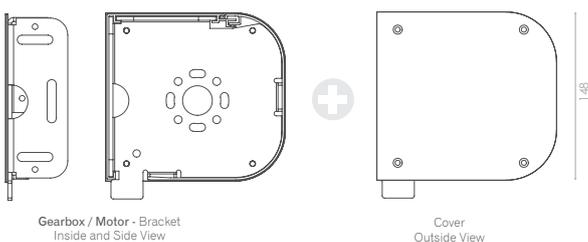


**New**

## STANDARD BRACKET WITH COVER

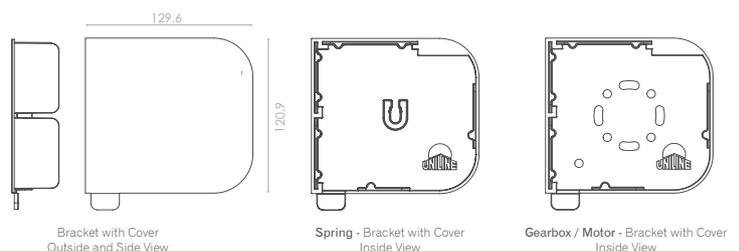

New

# PLUS CHANNEL TRACK SYSTEM

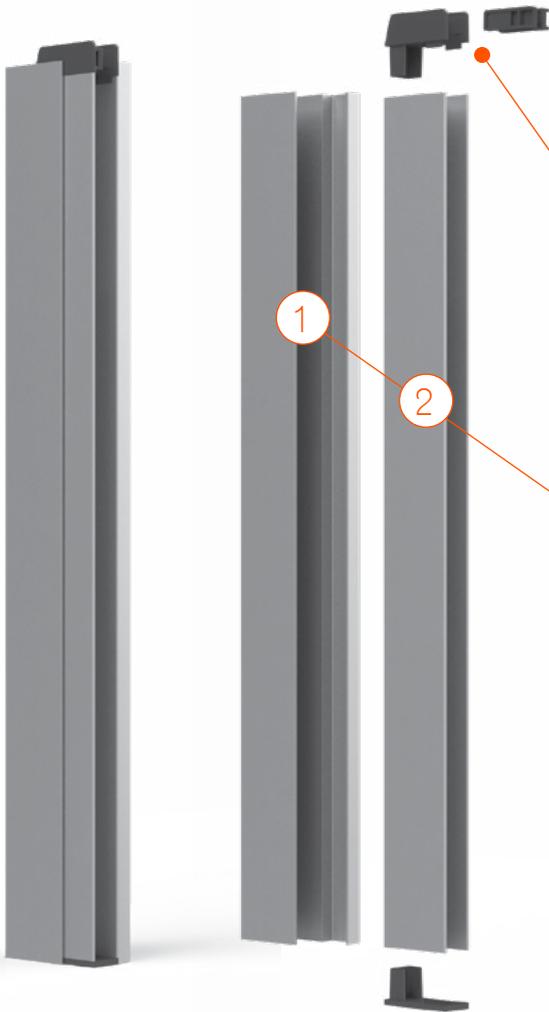

Introducing the **NEW Protecta PLUS** channel track system, with its new design features that allowing you to reveal fit or face fit with using the one channel. Its specially designed fixing section can take up to a 6mm screw head without interfering with the installation or operation of the awning.

## NYLON GUIDES AND STOPPERS

Our well designed Nylon guides and stoppers helps guide the zip/ Kedar into the Extruded aluminium channels and stops the zips from feeding out at the top channel.

## UNIQUE TO PROTECTA SIDE CHANNEL LOCK SYSTEM

### TWO OUTER FIXING SECTIONS

Have 2 outer fixing sections, one for **Gearbox** and **Motors** and 1 for **Spring** allows you to have multiple operation options. This section also allowing you to square off almost any opening for a night finish.

### ALUMINIUM CHANNELS

Extruded tracks self position, providing great stability for the fabric during windy conditions whilst the fabric is locked in place. The design absorbs the shock caused by the fabric movement in windy.

New

## CENTRAL LOCKING

# BOTTOM RAIL

 TO BE USED WITH SPRING OPERATED SYSTEMS

## LOCKABLE WITH SIDE CHANNEL

Exclusive to the PROTECTA Awning System, our bottom rail fitted with a lock has securing benefits while remaining sleek in design. Set multiple locking positions within the side channel to suit individual requirements and heights.



### BENEFITS

- No Creep
- Lock in multiple positions *(set heights at time of install)*
- Enclosed end caps

New

## WEIGHTED

# BOTTOM RAIL

 TO BE USED WITH GEARBOX AND MOTORISED OPERATED SYSTEMS

New

# PLUS + CHANNEL TRACK AWNING

COMPLETE COMPONENT SYSTEMS



## New SEAMLESS HEADBOX HOODING

Ergonomic and aesthetically designed hooding. Clean looking curves with no visible joining lines. Available in the new XL full, standard full or half hooding options.




## SCREEN FABRIC

Built to last and stand the test of time, you can put all your trust in Uniline's ScreenView 5% and ScreenShade 1%.

## New SIDE TENSION OPTION 💰

**Money Saver** Available in Zip or Kedar option built to last in extreme conditions.





## New BOTTOM RAIL 💰

**Money Saver** Has the option of central locking bottom rail or weighted bottom rail.



## PROTECTS FROM

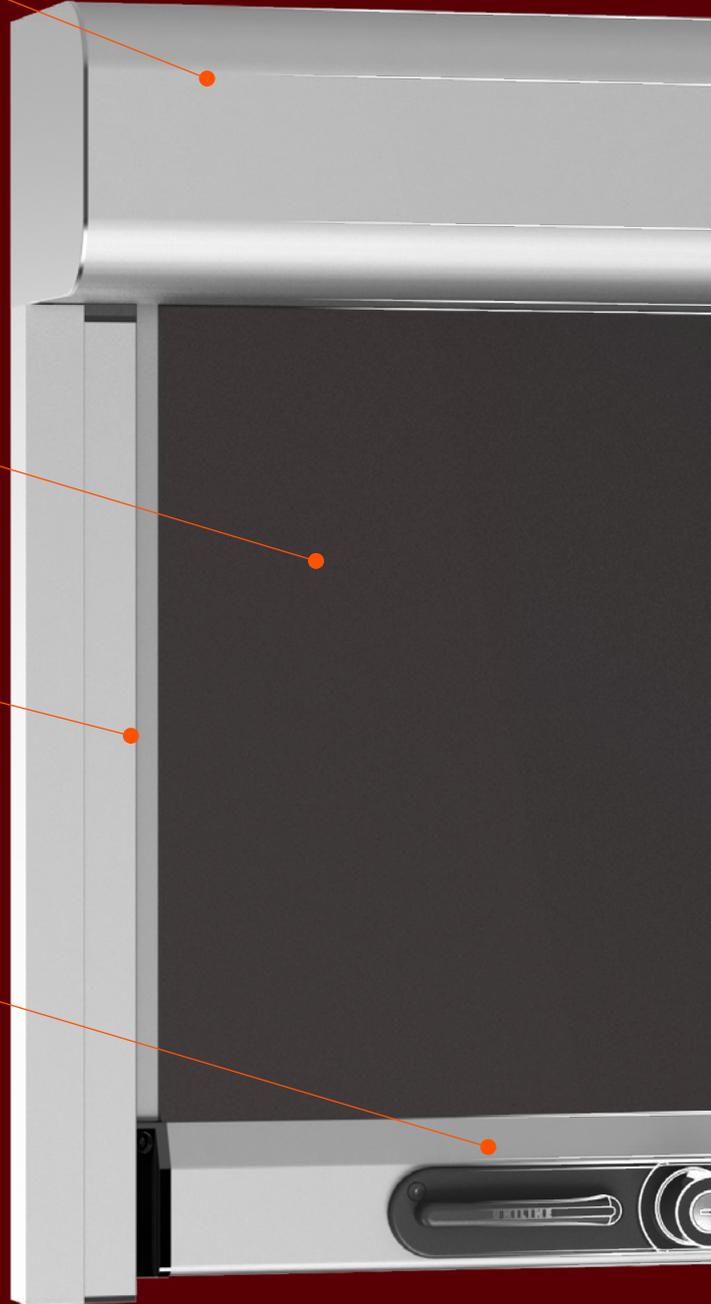



3m  
MAX Height



5.8m  
MAX Width

## PREMIUM AWNING SYSTEMS

Meet our latest creation, the **PROTECTA PLUS** channel track system! We've made the design smoother, simpler and incredibly user-friendly. With less components to worry about, the new design offers you the flexibility to reveal fit or face fit using just one channel.

### **New** SIDE COVER WITH BRACKET

**Money Saver** one piece cast aluminium.

### OPERATION OPTIONS

Available in the following configurations:

1. Spring
2. Gearbox
3. Motorisation

### **New** GUIDES & STOPPERS

**Money Saver** Designed Nylon guides and Stoppers helps guide the Zip/Kedar into the extruded aluminium channels and stops the zips from feeding out at the top channel.

### **New** TRACK CHANNEL

**Money Saver** Two outer fixing sections, one for Gearbox and Motors and one for Spring allows you to have multiple operation options, made from durable aluminium.

### **New** BOTTOM RAIL END CAP

Designed Nylon bottom rail End Cap offers more strength and durability.



SCAN ME



**PROTECTA**<sup>™</sup>  
AWNING SYSTEMS - BY UNILINE



# DEEP CHANNEL XTREME AWNING

COMPLETE COMPONENT SYSTEMS



## SEAMLESS HEADBOX HOODING

Ergonomic and aesthetically designed hooding. Clean looking curves with no visible joining lines. Available in the new XL full, standard full or half hooding options.



## SCREEN FABRIC

Built to last and stand the test of time, you can put all your trust in Uniline's ScreenView 5% and ScreenShade 1%.

## BOTTOM RAIL


**Money Saver** Select without or with lock, while retaining a sleek modern design. Set multiple locking positions within the side channel to suit individual requirements and heights.

## BOTTOM RAIL

**Money Saver** Set multiple locking positions within the side channel to suit individual requirements and heights.



LOCKABLE

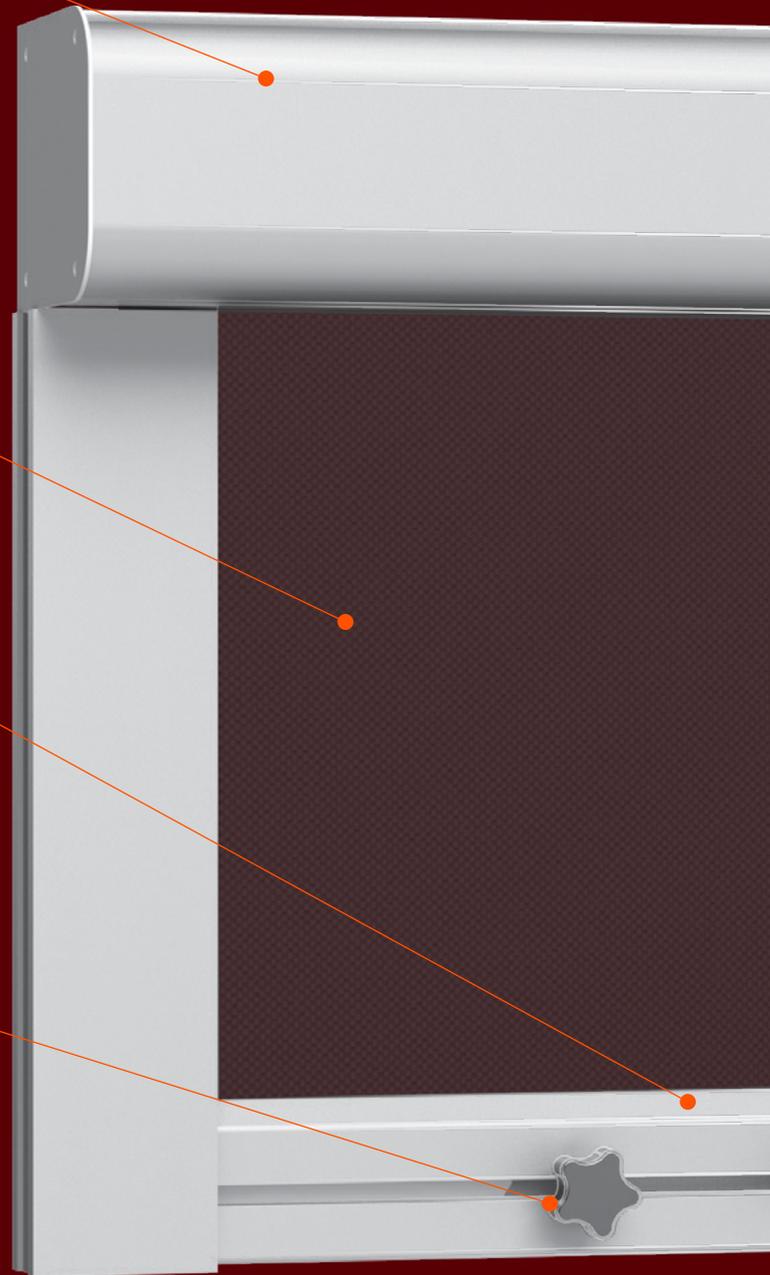

## PROTECTS FROM



WIND



SUN



INSECTS



RAIN



3m  
MAX Height



5.8m  
MAX Width

## PREMIUM AWNING SYSTEMS

Check out the newest **PROTECTA Deep Channel Xtreme Awning System** - it's just what you need. It's not just flawless in how it works, but also has a robust and solid appearance. Plus, with its single U channel system, saves you money too. There's even an option for a simply and sleekly designed bottom rail which can be locked - saving you even more money.

### SIDE COVER WITH BRACKET

**Money Saver** one piece cast aluminium.

### OPERATION OPTIONS

Available in the following configurations:

1. Gearbox
2. Motorisation

### BUG STRIP

**Money Saver** Bug strip included with all DX Deep Channels Xtreme.

### SIDE CHANNEL

**Money Saver** One U Channel to suit Reveal and Face Fit. No extra channel required. Adjustable for out of Square openings made from durable aluminium.





New

# PLUS CHANNEL TRACK

Our Protecta PLUS channel track system is now better than ever. The 2 Piece side channel system has the capability of being reveal fit or face fit without any extra extrusion, packers, or gap fillers.

Protecta plus has been designed for ease of installation and great looks for the end consumer. A side channel system that has the same Bracketing, the 8 other systems in the Protecta Family.

## FEATURES & BENEFITS

- Full aluminium extrusion system with optional steel tube
- Ebony plastic components to reduce colour fading
- Available in spring, gearbox or motor operations
- Central Locking system - lockable bottom rail in spring operated systems
- Adjustable Channels on each side One Extrusion to suit reveal or face fit.

## PROTECTS FROM



WIND



SUN



INSECTS



RAIN



## STANDARD COLOUR RANGE



\*Available in 40 custom colours on request.

New

# TWO FIXING PIECE CHANNEL TRACK TO SUIT REVEAL OR FACE FIT

New

## CENTRAL LOCKING

# BOTTOM RAIL TO BE USED WITH SPRING OPERATED SYSTEMS

## LOCKABLE WITH CHANNEL TRACK

Exclusive to the PROTECTA Awning System, our bottom rail fitted with a lock has securing benefits while remaining sleek in design. Set multiple locking positions within the side channel to suit individual requirements and heights.

### BENEFITS

- No Creep
- Lock in multiple positions with ease *(set heights at time of install)*
- Enclosed end caps

New

## WEIGHTED

# BOTTOM RAIL TO BE USED WITH GEARBOX AND MOTORISED OPERATED SYSTEMS

# SIDE CHANNEL Z3



The flagship model of the PROTECTA Awning Systems range, the Z3 Side Channel is the ultimate in all-weather protection. Wind, rain or sunshine, this system is built to withstand them all.

Independently tested\*, PROTECTA Z3 Side Channel Awning System can withstand wind gusts UP TO 220KM/H\*.

The lockable bottom rail option can also be used for greater security in spring operated systems.



## FEATURES & BENEFITS

- Full aluminium extrusion system with optional steel tube
- Ebony plastic components to reduce colour fading
- Available in spring, gearbox or motor operations
- Central Locking system - lockable bottom rail in spring operated systems
- 10mm adjustable tolerance on each side (for out of square applications)

## PROTECTS FROM



WIND



SUN



INSECTS



RAIN

## STANDARD COLOUR RANGE



\*Available in 40 custom colours on request.



Independently tested to withstand wind gusts UP TO 220KM/H\*

\* **DISCLAIMER:** Please see disclaimer and test results on PROTECTA website.

## UNIQUE TO PROTECTA Z3 SIDE CHANNEL LOCK SYSTEM:

### TWO PIECE CHANNEL


Aluminium profiles clip into one another to simplify installation and eliminate any visible fixing holes or the need for screw cap covers.

### ALUMINIUM ZIP TENSION TRACK

Extruded zip tension tracks self position, providing great stability for the fabric during windy conditions whilst the fabric retention remains locked in place with its zip lock feature. The Side Channel Lock and zip tension track design absorbs the shock caused by the fabric movement in windy conditions while delivering a stylish finish.

10mm ADJUSTABLE TOLERANCE ON EACH SIDE

INTERNAL ZIP TENSION TRACK SYSTEM ALLOWS FOR OUT OF SQUARE APPLICATIONS

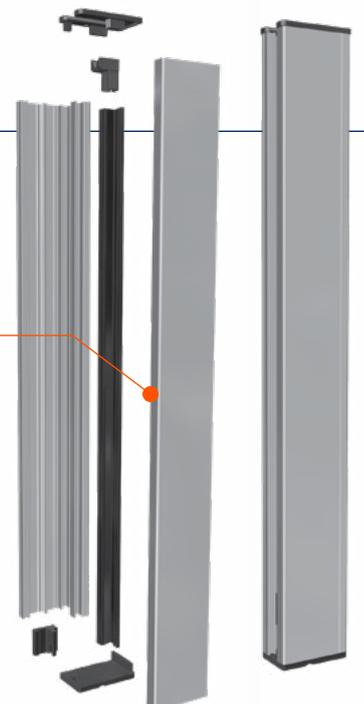



New

# DEEP CHANNEL XTREME DX

Where good looks and shading are your priority, the PROTECTA Deep Channel Xtreme Awning System is the right solution. Flawless in operation and robust in appearance.

Whether you are looking for the simplicity of crank operation or the high-tech motorised option. The lockable bottom rail option can also be used for greater security.

## FEATURES & BENEFITS

- Full aluminium extrusion system
- Ebony plastic components to reduce colour fading
- Available in gearbox or motor operations

## PROTECTS FROM



## STANDARD COLOUR RANGE



\*Available in 40 custom colours on request.

New

## CENTRAL LOCKING

# BOTTOM RAIL

TO BE USED WITH GEARBOX AND MOTORISED OPERATED SYSTEMS

## LOCKABLE WITH SIDE CHANNEL

Exclusive to the PROTECTA Awning System, our bottom rail fitted with a lock has securing benefits while remaining sleek in design. Set multiple locking positions within the side channel to suit individual requirements and heights.

## BENEFITS

- No Creep
- Lock in multiple positions  
*(set heights at time of install)*

New

## WEIGHTED

# BOTTOM RAIL

TO BE USED WITH GEARBOX AND MOTORISED OPERATED SYSTEMS

New

## ONE COMPONENT

# BRACKET WITH COVER

BEST OF BOTH WORLDS LESS COST AND MORE STORAGE SPACE

# MULTI-STOP



Ideal for residential applications or small commercial jobs. It features multiple stopping points allowing superior light and glare control.

The Multi-Stop Side Channel Awning has a streamlined appearance with no exposed cords, cleats or wires. This awning system is top roll and spring operated, with an easy twist lock bottom rail operation making it a very simple to use and quiet to operate.

The side channels are non-intrusive, made from aluminium, and are available in a variety of powder coated colours to suit any exterior. This system is only available as spring operated.



## FEATURES & BENEFITS

- Can be installed in both face fit and reveal fit
- Stop and lock the bottom rail in any position
- Side channels are available in a variety of powder-coated colours, making it easier to colour-match to the building exterior
- Multiple “stopping points” allow for superior control of light and glare

## PROTECTS FROM



SUN



INSECTS



RAIN

## STANDARD COLOUR RANGE




\*Available in 40 custom colours on request.

## SEAMLESS

**HOOD** CLEAN LOOKING CURVES WITH NO VISIBLE JOINING LINES

## DURABLE CAST ALUMINIUM

Can be face fit or reveal fit and allow for the removal of the roller tube without removing the system from the wall. The simplicity of the headbox and hooding allows easy access to operational spring system.

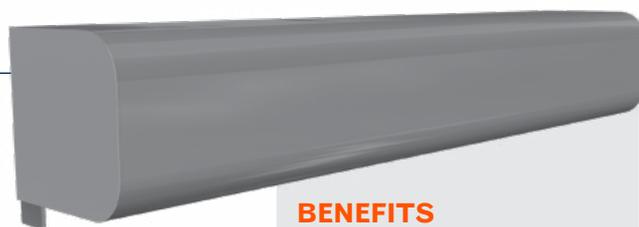

## BENEFITS

- Modern Design
- Easy Clip-In Installation
- Lightweight
- Cast Aluminium

New

## ONE COMPONENT

**BRACKET WITH COVER** BEST OF BOTH WORLDS LESS COST AND MORE STORAGE SPACE



## WIRE GUIDE



Impeccably constructed right down to the smallest detail, the PROTECTA Wire Guide external awning by Uniline.

Designed for large openings through to patios and balconies, Wire Guide will keep your awnings on track, even in light breezes.

Architecturally designed stainless steel fittings and cabling suspend and secure the awning. Various bracket selections and glass-filled nylon end caps add extra stability.

Standard operation is with a gearbox, but motorisation is also an available option.



### FEATURES & BENEFITS

- Wire Guide can be face fit or ceiling mounted
- Enclose in a balcony or pergola for year-round shade to deflect sun
- All components are corrosion-resistant, ideal for coastal locations
- Gearbox and motorised systems available

### PROTECTS FROM



### STANDARD COLOUR RANGE




\*Available in 40 custom colours on request.

## SEAMLESS HOOD CLEAN LOOKING CURVES WITH NO VISIBLE JOINING LINES

### DURABLE CAST ALUMINIUM

Can be face fit or reveal fit and allow for the removal of the roller tube without removing the system from the wall. The simplicity of the headbox and hooding allows easy access to operational spring system.

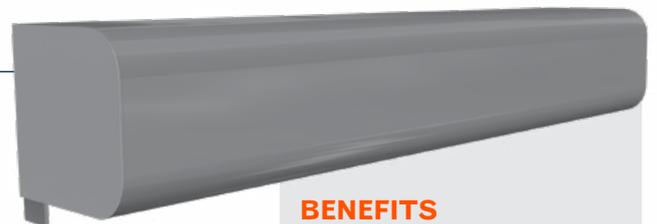

### BENEFITS

- Modern Design
- Easy Clip-In Installation
- Lightweight
- Cast Aluminium

New

## ONE COMPONENT BRACKET WITH COVER BEST OF BOTH WORLDS LESS COST AND LESS STORAGE

# PIVOT P



Designed to deflect heat and glare while maximising light, ventilation and privacy.

Uniline have taken the Archline system and Protéger Pivot and combined them into one sleek and stylish system while adding significant new functionality and hardware, bringing it to a new level and into our premium PROTECTA range. The most obvious change is the new front rail, designed to perform both horizontally and vertically. Add to that heavy-duty flexible joints, which perfectly compliment the front rail, and it becomes even easier to operate. All of this is then matched perfectly with the stylish PROTECTA headbox using the half hooding option.



## FEATURES & BENEFITS

- Caters for widths up to 5m (without hooding), and can project out to 1.5m
- Tough enough to withstand the elements thanks to its powder-coated aluminium body and 3.2mm diameter spring with a stainless steel cable
- Slide rails available to cater for longer drops and reducing obstruction

### PROTECTS FROM



## STANDARD COLOUR RANGE




\*Available in 40 custom colours on request.

## SEAMLESS HOOD

CLEAN LOOKING CURVES WITH NO VISIBLE JOINING LINES

## DURABLE CAST ALUMINIUM

Can be face fit or reveal fit and allow for the removal of the roller tube without removing the system from the wall. The simplicity of the headbox and hooding allows easy access to operational spring system.

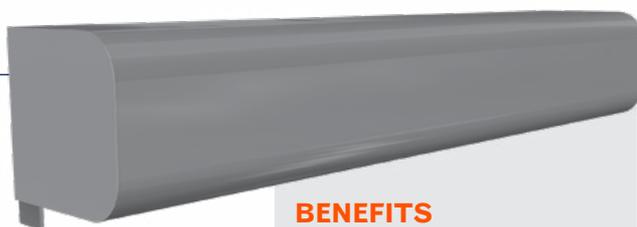

### BENEFITS

- Modern Design
- Easy Clip-In Installation
- Lightweight
- Cast Aluminium

New

## ONE COMPONENT BRACKET WITH COVER

BEST OF BOTH WORLDS LESS COST AND LESS STORAGE



## GUIDE RAIL GR

Want to shade your windows from direct sunlight without losing out on fresh air and breezes?

Cue the bestselling Guide Rail Awning from Uniline. Created for ground floor windows, the slanted design sits out slightly from the base of the window, inviting breezes while still maintaining optimum privacy and heat protection.

### FEATURES & BENEFITS

- Perfect performance, year after year, thanks to Uniline's quality engineering revered for outstanding strength and longevity
- Ideal in coastal locations

### PROTECTS FROM



### STANDARD COLOUR RANGE



\*Available in 40 custom colours on request.

### SEAMLESS

**HOOD** CLEAN LOOKING CURVES WITH NO VISIBLE JOINING LINES

### DURABLE CAST ALUMINIUM

Can be face fit or reveal fit and allow for the removal of the roller tube without removing the system from the wall. The simplicity of the headbox and hooding allows easy access to operational spring system.



### BENEFITS

- Modern Design
- Easy Clip-In Installation
- Lightweight
- Cast Aluminium

New

### ONE COMPONENT

**BRACKET WITH COVER** BEST OF BOTH WORLDS LESS COST AND LESS STORAGE

# STRAIGHT DROP



PROTECTA Straight Drop is suitable for use as an external screen in a low wind area.

Our Straight Drop system is perfect for providing extra privacy & sun protection where required. Great for areas like patios, pergolas and balconies.

Operation available as gearbox with 2 different gear ratios available or motorised for automation.

Fixing straps have to be removed before any fabric retraction is initiated.

## FEATURES & BENEFITS

- Provides great protection from sunlight and glare
- Gearbox and motorised options only
- Perfect for entertaining areas
- Secure using Web & Buckles providing great control in gentle breezes

## PROTECTS FROM



## STANDARD COLOUR RANGE




\*Available in 40 custom colours on request.

## SEAMLESS HOOD

CLEAN LOOKING CURVES WITH NO VISIBLE JOINING LINES

## DURABLE CAST ALUMINIUM

Can be face fit or reveal fit and allow for the removal of the roller tube without removing the system from the wall. The simplicity of the headbox and hooding allows easy access to operational spring system.

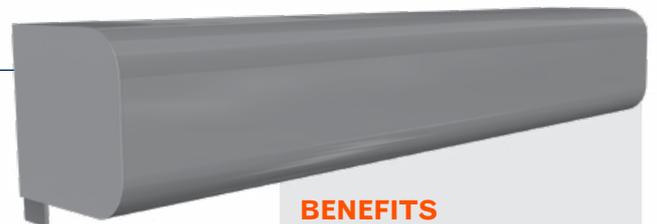

## BENEFITS

- Modern Design
- Easy Clip-In Installation
- Lightweight
- Cast Aluminium

New

## ONE COMPONENT BRACKET WITH COVER

BEST OF BOTH WORLDS LESS COST AND MORE STORAGE SPACE

## UNIGLIDE EXT 30 AC MOTOR

The UniGlide Ext AC 30 is the perfect choice for all sizes of external awnings, with an impressive torque of 30Nm at 17rpm. Whether at home or away, have full control of your awnings by using the UniGlide Neo home automation System. Step into the future of smart home technology.



## UNIGLIDE REMOTE CONTROL

With the simplest integration and finest design, choose from either a UniGlide single or multi-channel remote to operate your awnings. Each channel can be controlled individually, or you have the capacity to group specific blinds together.



## UNIGLIDE NEO-APP BOX CONTROL

UniGlide Neo home automation is versatile and easy to set up. Simply purchase the Neo App Box, UniGlide Motor and download the free Neo Smart Blinds App (available on both Android and Apple devices). A key feature of the app is that it allows you to remotely control your blinds whilst you are away from your home. Set up weekly schedules for the opening and closing of your awnings.



# Uniline General Warranty Document

Uniline Australia Pty Ltd "Uniline" warrants that its window covering materials (fabrics) and components listed below will be free from defects in materials and workmanship for the stated periods from the date of purchase, subject to the provisions of this warranty, provided they were purchased after 1st January 2018 and were:

1. Supplied by Uniline Australia; and
2. Manufactured by an accredited Uniline Manufacturer; and
3. Sold by an accredited Uniline Reseller; and
4. Professionally installed by an accredited Uniline Installer and according to Uniline installation standard procedures; and
5. The entire system supplied to the consumer is a Uniline system and not parts thereof.

This warranty is limited to the repair or replacement of the defective materials and components. Repairs will be made with like or similar parts. Uniline reserves the right to discharge its obligations under this warranty by refunding the original purchase price of the defective materials or components.

Uniline reserve the right to separate the warranty, into the following four (4) categories:

1. \* Hardware Component Systems – (5 Years) - A Uniline window furnishing will be made up of a number of hardware components, known as a system. Uniline reserves the right to refuse any warranty if parts of the system are not made up of genuine Uniline components.
2. Uniline Window Covering Materials (Fabrics) – (5 to 10 Years) - Uniline will warrant any window covering material which is manufactured or supplied by Uniline Australia limited for the stated warranty period.
3. Uniline accredited Motorisation – Uniline will warrant any gearing mechanism or motorisation mechanism which has been supplied, tested and accredited by Uniline.

These include:

- a. Geiger gearboxes – (5 Years)
- b. UniGlide Motors AC – (5 Years)
- c. UniGlide Motor DC – (3 Years)

If a consumer chooses to select only part of the Uniline system, but chooses another supplier's fabric, Uniline will warrant the Uniline part of the system under the standard warranty conditions of that particular part.

## This Warranty Excludes:

Any condition or damage relating to, or resulting from, accidents, alterations, discolouration or fading over time, misuse, abuse, normal wear and tear, removal and/or reinstallation, failure to follow the installation or use instructions of Uniline, or force majeure including, without limitation, storm, fire, floods, cyclone's, standing water, explosions, earthquakes, vandalism, riots, acts of war, pollutants, acts of God or other occurrences beyond the control of Uniline. New line installations subject to salt spray or marine influences, severe industrial or corrosive environments or internal situations subject to moisture laden air. Shipping charges and costs for removing, disassembling, reassembling and reinstalling the materials or components.

## Special Conditions

\* 100% Uniline supplied components includes tubes, gearboxes, drive adapters, motor adapters, idle ends, pivot plate and pins, splines and any other specific components that are sold by Uniline. All methods, allowances and specifications must follow the information provided in the manufacturing and installations guides as provided by Uniline. All sizes and installations must fall within the guidelines provided by the product specification document. Failure to adhere to any of the above clauses will result in the voiding of all warranties.

## Interpretation

This warranty shall be interpreted and applied subject to the operation of any statute applicable in Australia, the terms of which cannot be excluded by the parties, including (if applicable) relevant provisions of the Trade Practices Amendment (Australian Consumer Law) Act (No. 1) 2010 and similar State legislation. With the exception of the matters outlined in this document, all other implied terms, warranties, conditions and consequences are excluded.

## Warranty Claims

Warranty claims must be made as soon as possible after discovery of the defect and, in any event, within the warranty period. Warranty claims must be accompanied by proof of payment of the full purchase price by the original purchaser.

## Warranty Process

Contact the place of purchase or take the product back to the place of purchase. The place of purchase must be an accredited Uniline supplier. Proof of purchase (a copy of the tax receipt detailing the date of the purchase, the product purchased & the place of purchase) from an accredited Uniline reseller is required for all warranty claims. All accredited Uniline resellers can be viewed on the Uniline website.



Quality Fabrics & Component Systems for:  
INTERNAL BLINDS // EXTERNAL AWNINGS

## \*Disclaimer and Indemnity

Please note, there is no Australian wind rated test for window coverings and awning systems. These tests were performed in a controlled laboratory environment pressure chamber to evaluate the strength of the Z3 Side Channel System under wind loads. The results, documented in CTS report TS1102, showed that the Z3 Side Channel System can safely resist a design pressure of 0.27kPa (a 1.5 factor of variability has been applied) when installed at a 4,000mm span in the "worst" orientation with wind acting to pull the mesh out of the side channel and the side channels installed in a reveal fit configuration. This pressure could be equated, for a typical single storey house in a non-cyclonic region with the mesh enclosing the front of a patio, to a wind speed of approx. 110 kph. Uniline cannot therefore accept responsibility if a Z3 Side Channel System sustains damage relating to, or resulting from, accidents, alterations, not using 100% Uniline components, discolouration or fading over time, misuse, abuse, normal wear and tear, removal and/or re-installation, failure to follow the installation or use instructions of Uniline, or force majeure including, without limitation, storm, fire, floods, cyclone's, standing water, explosions, earthquakes, vandalism, riots, acts of war, pollutants, acts of God or other occurrences beyond the control of Uniline. Similarly installations subject to salt spray or marine influences, severe industrial or corrosive environments or internal situations subject to moisture laden air. Also excluded are shipping charges and costs for removing, disassembling, reassembling and reinstalling the materials or components.

You shall indemnify and hold unaccountable Uniline, its agents, suppliers, distributors, sub-distributors, successors or assigns, and their respective directors, officers, shareholders and employees (each an indemnified party), from and against any and all damages, liabilities, costs, losses and expenses (including reasonable legal costs and fees) arising from or related to any claim, demand, complaint or action by a third party which an indemnified party may suffer or incur in connection with your business activities (including without limitation your performance of partner services, your failure to comply with the provisions hereof (including any failure to perform partner services in accordance with our then-current policies and procedures), or your negligence or wilful misconduct.



# PROTECTA™

AWNING SYSTEMS



PLUS  
CHANNEL



Z3 SIDE  
CHANNEL



DEEP  
CHANNEL XL



WIRE  
GUIDE



GUIDE RAIL



PIVOT



MULTI-STOP



STRAIGHT  
DROP

*Approved Protecta Installer and Dealer*



**02 6041 2822**

[info@sunjan.com.au](mailto:info@sunjan.com.au)

[www.sunjan.com.au](http://www.sunjan.com.au)

256 Townsend St, Albury South, NSW 2640

*"Sunjan Trading - Providing Reliable Service For over 30 Years"*