



MULTI-STOP

Ideal for residential applications or small commercial jobs. It features multiple stopping points allowing superior light and glare control.

The Multi-Stop Side Channel Awning has a streamlined appearance with no exposed cords, cleats or wires. This awning system is top roll and spring operated, with an easy twist lock bottom rail operation making it a very simple to use and quiet to operate.

The side channels are non-intrusive, made from aluminium, and are available in a variety of powder coated colours to suit any exterior. This system is only available as spring operated.



FEATURES & BENEFITS

- Can be installed in both face fit and reveal fit
- Stop and lock the bottom rail in any position
- Side channels are available in a variety of powder-coated colours, making it easier to colour-match to the building exterior
- Multiple "stopping points" allow for superior control of light and glare

PROTECTS FROM



STANDARD COLOUR RANGE



*Available in 40 custom colours on request.

SEAMLESS HOOD CLEAN LOOKING CURVES WITH NO VISIBLE JOINING LINES

DURABLE CAST ALUMINIUM

Can be face fit or reveal fit and allow for the removal of the roller tube without removing the system from the wall. The simplicity of the headbox and hooding allows easy access to operational spring system.



BENEFITS

- Modern Design
- Easy Clip-In Installation
- Lightweight
- Cast Aluminium

New

ONE COMPONENT BRACKET WITH COVER BEST OF BOTH WORLDS LESS COST AND MORE STORAGE SPACE




SPECIFICATIONS

	STANDARD	
Maximum Width	4,000mm	
Maximum Drop	3,000mm	
Maximum Area	12m ²	
Tube	63mm Roll Formed Zincalume© .75mm AZ150 (5600mm/6500mm) 63mm Aluminium 6106 - T6 50mm Roll Formed Zincalume	
Drives	63mm Unispring Assembly 830mm and 13700mm 50mm Unispring Assembly 515mm and 830mm	
Idler with Hole	Nylon 66 (5% Glass Filled)	
Brackets	Zinc Plated Mild Steel Powder Coated	New Cast Aluminium
Bracket Covers	Cast Aluminium	
Cassette	Aluminium 6106 - T6	
Hoarding Size	Height – 120.9mm Projection – 129.6mm Material – Aluminium Finish – Powder Coat	
Side Channel	Aluminium T6063	
Side Channel End Caps	Cast Aluminium	
Pivot Pin & Plate	T304 Stainless Steel Mild Steel (Zinc Plated Service Condition 4)	
Bottom Rail	5 Sided Tube Aluminium Powder Coated 5 Sided Tube Steel Powder Coated	
Bottom Rail End Cap	Nylon	

New

STANDARD BRACKET WITH COVER

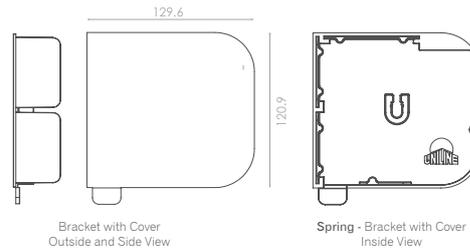

STANDARD HOODS



UNISPRING

PRETENSION CHART

- 50mm 58mm short and 63mm 515mm short
- 50mm 830mm standard
(add helper spring for fabric over 600g/m²)
- 63mm 1370 mm standard
- 63mm standard wth helper
(equal pretension turns on each spring)

DROP (mm)	WIDTH (mm)															
	600	900	1200	1500	1800	2100	2400	2700	3000	3300	3600	3900	4200	4500	4800	5000
300	5	5	6	6	7	8	9	10	10	12	13	13	14	14	8+8	8+8
600	5	5	6	6	7	9	9	10	10	12	13	13	14	14	8+8	8+8
1200	5	5	6	6	7	9	9	10	10	12	13	13	14	14	8+8	8+8
15000	5	5	6	6	8	8	9	10	10	12	13	13	14	14	8+8	8+8
1800	5	5	6	8	8	9	9	10	10	12	13	13	14	14	8+8	8+8
2100	5	5	6	8	8	9	9	10	10	12	13	13	14	14	8+8	8+8
2400	5	5	6	8	8	9	9	12	12	12	13	13	14	7+7	8+8	8+8
2700	5	5	6	8	8	9	9	12	12	12	13	13	7+7	7+7	8+8	8+8
3000	5	5	6	10	10	11	11	12	12	12	13	7+7	7+7	7+7	8+8	8+8
3300	5	5	6	10	10	11	11	12	12	12	7+7	7+7	7+7	7+7	8+8	8+8
3600	5	5	6	10	10	11	11	12	12	12	6+6	7+7	7+7	7+7	8+8	8+8

A New Era in External Awnings... Amazing Shade

Call: 02 6041 2822 // info@sunjan.com.au // sunjan.com.au
256 TOWNSEND ST, ALBURY SOUTH, NSW 2640

