

**Automatic Awnings** are built tough with sturdy solid side guides and arms. The arms are set off the walls and allows for a generous flow of air into open windows and prevents heat from being trapped between the material and your home. A spring-loaded top roller keeps the Awning under constant tension and helps maintain a taught, neat look over its lifetime. A simple twist and lift mechanism allows for the quick setting of desired positions anywhere along the automatic guides. Choose from 50mm or 63mm Unispring Assembly.



PROTECTS AGAINST			OPERATION		WARRANTY
					
SUN	RAIN	WIND**	MOTORISED	GEARBOX	5 YEAR COMPONENTS WARRANTY


**BASIC AWNING**

- Classic exposed awning
- Suited for undercover areas
- Stainless steel fittings.
- Standard colours available for bottom rail, side channels and fittings.
- Spring-loaded top roller keeps awning taught.
- Available in 7 bracket colours.
- Custom colours available.



**BRACKET DIMENSIONS**

80mm




**OVER-ROLL AWNING**

- Folded angle hooding
- For both undercover & exposed areas.
- Available in 17 colours.
- Hooding & hood ends available in colorbond® colours.
- Galvanised steel powder coated hood ends.
- Custom colours available.



**HOOD DIMENSIONS**




**UNDER-ROLL AWNING**

- Folded angle hooding with beaded edge.
- Suited for both undercover & exposed areas.
- Available in 17 colours.
- Hooding and hood ends available in colorbond® colours.
- Galvanised steel powder coated hood ends.
- Custom colours available.



**HOOD DIMENSIONS**




**MULTI-ROLL AWNING**

- Smooth curved hooding
- Suited for both undercover & exposed areas.
- Available in 10 colours.
- Hooding and hood ends available in colorbond® colours.
- Galvanised steel powder coated hood ends.
- Custom colours available.



**HOOD DIMENSIONS**



\*\* Wind resistant, we strongly recommend in strong winds that awnings be retracted.  
\* See colour choice on page 2.

**SPECIFICATIONS**

<b>Hooding Multi-roll</b>	Material – Steel Baked Polyester 10 Colour – Colourbond
Brackets	Zinc Plated Mild Steel Powder Coated

or

<b>Hooding Under-roll</b>	Material – Steel Baked Polyester 17 Colour – Colourbond
Brackets	Zinc Plated Mild Steel Powder Coated

or

<b>Hooding Over-roll</b>	Material – Steel Baked Polyester 17 Colour – Colourbond
Brackets	Zinc Plated Mild Steel Powder Coated

or

<b>Basic (no hooding)</b>	
Brackets	80mm Universal Fixing Bracket Mounting Plate Side Channel Awning Brackets RH & LH 7 Colour – Colourbond
Pivot Pin & Plate	Pivot Pin & Plate - Plastic and Steel

common parts

Maximum Width	3,500mm
Maximum Drop	2,700mm
Maximum Area	9.45m <sup>2</sup>
Tube	63mm Tube - Zinalume® 50mm Tube - Zinalume®
Drives	63mm Unispring Assembly 50mm Unispring Assembly
Idler Ends	50mm Idler Ends & Pins 63mm Idler Ends & Pins
Side Channel	Smooth Side Channel Aluminium
Side Channel End Caps	Plastic
Bottom Rail	5 Sided Tube Aluminium Mill 5 Sided Tube Steel Powder Coated
Bottom Rail End Cap	5 Sided End Cap - Plastic

**STANDARD HOODING COLOUR RANGE**


Tru-style Under-roll and Over-roll hoodings comes in a range of 17 standard contemporary colorbond® colours. New Multi-roll hooding available in 10 colours (highlighted by\*)

You also have the option to have custom colours through Metfin Powder Coating.



**BRACKET COLOUR RANGE**

Tru-style Basic Awnings brackets comes in a range of 7 standard contemporary colorbond® colours.

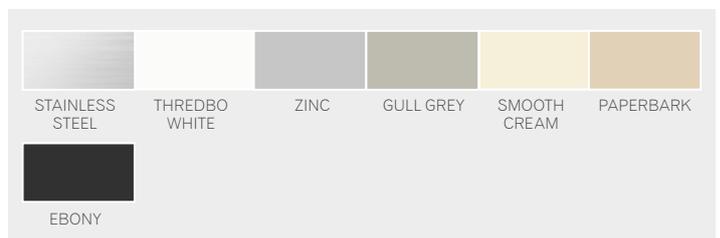

The preferred supplier to the blind and awning industry