



PROTECTA™
AWNING SYSTEMS - BY UNILINE

WIRE GUIDE



Impeccably constructed right down to the smallest detail, the PROTECTA Wire Guide external awning by Uniline.

Designed for large openings through to patios and balconies, Wire Guide will keep your awnings on track, even in light breezes.

Architecturally designed stainless steel fittings and cabling suspend and secure the awning. Various bracket selections and glass-filled nylon end caps add extra stability.

Standard operation is with a gearbox, but motorisation is also an available option.



FEATURES & BENEFITS

- Wire Guide can be face fit or ceiling mounted
- Enclose in a balcony or pergola for year-round shade to deflect sun
- All components are corrosion-resistant, ideal for coastal locations
- Gearbox and motorised systems available

PROTECTS FROM



STANDARD COLOUR RANGE



*Available in 40 custom colours on request.

SEAMLESS

HOOD CLEAN LOOKING CURVES WITH NO VISIBLE JOINING LINES

DURABLE CAST ALUMINIUM

Can be face fit or reveal fit and allow for the removal of the roller tube without removing the system from the wall. The simplicity of the headbox and hooding allows easy access to operational spring system.



BENEFITS

- Modern Design
- Easy Clip-In Installation
- Lightweight
- Cast Aluminium

New

ONE COMPONENT

BRACKET WITH COVER BEST OF BOTH WORLDS LESS COST AND LESS STORAGE




SPECIFICATIONS

	Standard	Xtra Large
Maximum Width	4,000mm	5,800mm
Maximum Drop	3,000mm	3,000mm
Maximum Area	12m ²	17.4m ²
Tube	63mm Roll Formed Zin-calume® .75mm AZ150 (5600mm/6500mm) 63mm Aluminium 6106 - T6	70mm, 78mm, 185mm Galvinised
Drives	Gearbox Geiger 2.7:1 Gearbox Geiger 9:1 UniGlide Motors	Gearbox Geiger 2.7:1 Gearbox Geiger 9:1 UniGlide Motors
Drive End	Nylon 66 (5% Glass Filled)	Nylon 66 (5% Glass Filled)
Idler with Hole	Nylon 66 (5% Glass Filled)	Nylon 66 (5% Glass Filled)
Brackets	Zinc Plated Mild Steel Powder Coated New Cast Aluminium	New Zinc Plated Mild Steel Powder Coated
Bracket Covers	Cast Aluminium	New Cast Aluminium
Hoarding Size	Height – 120.9mm Projection – 129.6mm Material – Aluminium 6106 - T6 Finish – Powder Coat	Height – 146mm Projection – 154mm Material – Aluminium 6106 - T6 Finish – Powder Coat
Cassette	Aluminium 6106 - T6	Aluminium 6106 - T6
Top Bush	316 Stainless Steel	316 Stainless Steel
Pivot Pin & Plate	T304 Stainless Steel Mild Steel (Zinc Plated Service Condition 4)	T304 Stainless Steel Mild Steel (Zinc Plated Service Condition 4)
Wire Guide Cable	3.2mm 316 Stainless Steel (1 x 19 Construction)	3.2mm 316 Stainless Steel (1 x 19 Construction)
Bottom Bush	316 Stainless Steel	316 Stainless Steel
L Bracket	304 Stainless Steel	304 Stainless Steel
Deck Plate	316 Stainless Steel	316 Stainless Steel
Bottom Rail	Aluminium 6063 T5 End Cap	Aluminium 6063 T5 End Cap
Master & Guide	Nylon 66 (5% Glass) & 316 Stainless Steel	Nylon 66 (5% Glass) & 316 Stainless Steel


*For awnings wider than 4m, we recommend using an Xtra Large hoarding. If a Standard hoarding is to be used, we recommend for the middle of the hoarding to be mounted.

New

STANDARD BRACKET WITH COVER

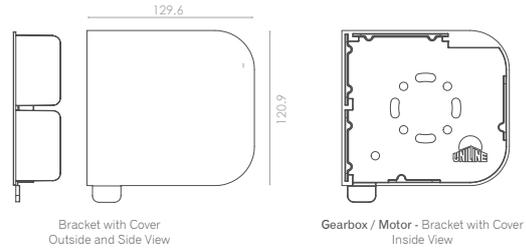


STANDARD HOODS

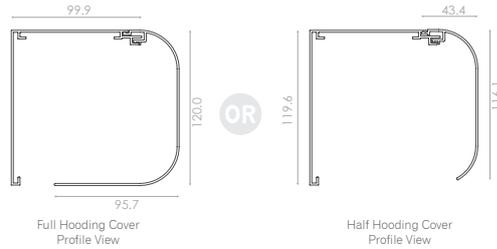

New

XTRA LARGE BRACKET AND COVER

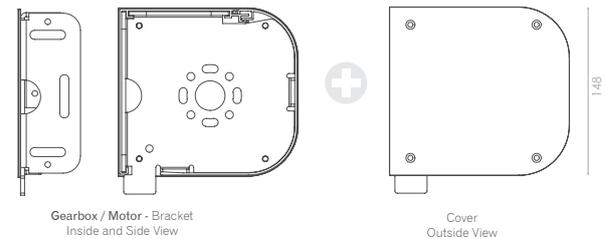

XTRA LARGE HOOD



A New Era in External Awnings... Amazing Shade

Call: 02 6041 2822 // info@sunjan.com.au // sunjan.com.au
256 TOWNSEND ST, ALBURY SOUTH, NSW 2640

