

**Multi-stop Awning** has a very neat streamlined appearance with no exposed cords, cleats or visible wires. A simple twist of the bottom rail allows you to pull the awning up and down. A simple twist back and the blind is locked in position.

Ideal for windows and pergolas while inviting cool breezes with privacy and heat protection.



PROTECTS AGAINST			OPERATION	WARRANTY
				
SUN	RAIN	WIND**	SPRING	5 YEAR COMPONENTS WARRANTY


**BASIC AWNING**

- Classic exposed awning
- Suited for undercover areas
- Stainless steel fittings.
- Standard colours available for bottom rail, side channels and fittings.
- Spring-loaded top roller keeps awning taut.
- Available in 7 bracket colours.
- Custom colours available.



**BRACKET DIMENSIONS**

80mm




**OVER-ROLL AWNING**

- Folded angle hooding
- For both undercover & exposed areas.
- Available in 17 colours.
- Hooding & hood ends available in colorbond® colours.
- Galvanised steel powder coated hood ends.
- Custom colours available.



**HOOD DIMENSIONS**




**UNDER-ROLL AWNING**

- Folded angle hooding with beaded edge.
- Suited for both undercover & exposed areas.
- Available in 17 colours.
- Hooding and hood ends available in colorbond® colours.
- Galvanised steel powder coated hood ends.
- Custom colours available.



**HOOD DIMENSIONS**




**MULTI-ROLL AWNING**

- Smooth curved hooding
- Suited for both undercover & exposed areas.
- Available in 10 colours.
- Hooding and hood ends available in colorbond® colours.
- Galvanised steel powder coated hood ends.
- Custom colours available.



**HOOD DIMENSIONS**



\*\* Wind resistant, we strongly recommend in strong winds that awnings be retracted.  
\* See colour choice on page 2.

## SPECIFICATIONS

<b>Hooding Multi-roll</b>	Material – Steel Baked Polyester 10 Colour – Colourbond
<b>Brackets</b>	Zinc Plated Mild Steel Powder Coated

or

<b>Hooding Under-roll</b>	Material – Steel Baked Polyester 17 Colour – Colourbond
<b>Brackets</b>	Zinc Plated Mild Steel Powder Coated

or

<b>Hooding Over-roll</b>	Material – Steel Baked Polyester 17 Colour – Colourbond
<b>Brackets</b>	Zinc Plated Mild Steel Powder Coated

or

<b>Basic (no hooding)</b>	
<b>Brackets</b>	80mm Universal Fixing Bracket Mounting Plate Side Channel Awning Brackets RH & LH 7 Colour – Colourbond
<b>Pivot Pin &amp; Plate</b>	Pivot Pin & Plate - Plastic and Steel

common parts

<b>Maximum Width</b>	4,000mm
<b>Maximum Drop</b>	2,700mm
<b>Maximum Area</b>	9.45m <sup>2</sup>
<b>Tube</b>	63mm Tube - Zinalume® 50mm Tube - Zinalume®
<b>Drives</b>	63mm Unispring Assembly 50mm Unispring Assembly
<b>Idler Ends</b>	50mm Idler Ends & Pins 63mm Idler Ends & Pins
<b>Side Channel</b>	Smooth Side Channel Aluminium
<b>Side Channel End Caps</b>	Plastic
<b>Bottom Rail</b>	5 Sided Tube Aluminium Mill 5 Sided Tube Steel Powder Coated
<b>Bottom Rail End Cap</b>	5 Sided End Cap - Plastic

## 50MM, 63MM TUBE & UNSPRING CHART

DROP	WIDTH (mm)												
	600	900	1200	1500	1800	2100	2400	2700	3000	3300	3600	3900	4000
	50mm TUBE									63mm TUBE			
600	5	5	6	6	7	9	9	10	10	12	13	13	13
1200	5	5	6	6	8	9	9	10	10	12	13	13	13
1500	5	5	6	8	8	9	9	10	10	12	13	13	13
1800	5	5	6	8	8	9	9	10	10	12	13	13	13
2100	5	5	6	8	8	9	9	12	12	12	13	13	13
2400	5	5	6	8	8	9	11	12	12	12	13	13	13
2700	5	5	6	10	10	11	11	12	12	12	13	14	14

515mm Short Spring      830mm Standard Spring

1370mm Heavy Spring

All turn counts are approximate and should only be followed as a guide

## STANDARD HOODING COLOUR RANGE


Tru-style Under-roll and Over-roll hoodings comes in a range of 17 standard contemporary colorbond® colours. New Multi-roll hooding available in 10 colours (highlighted by\*)

You also have the option to have custom colours through Metfin Powder Coating.



## BRACKET COLOUR RANGE

Tru-style Basic Awnings brackets comes in a range of 7 standard contemporary colorbond® colours.

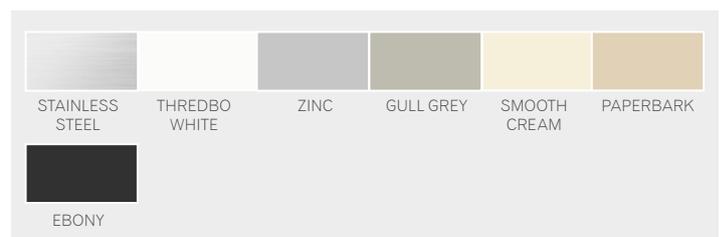

The preferred supplier to the blind and awning industry

Australia Free Call: 1800 777 331 // sales@uniline.com.au // uniline.com.au

New Zealand Free Call: 0800 700 801 // sales@uniline.co.nz // uniline.co.nz